


Scotts rotary spreaders: AccuPro 2000 / SR 2000

Settings for double pass application at half rate

Product name	Cone setting	Effective width (m)	Spreader setting at half label rates amount of product (g/m ²) applied after two runs:												
			5	10	15	20	25	30	35	40	45	50	55	60	
Sierrablen®															
Sierrablen	4	5,4				L½	M	N	O	O½	P	Q	R	R½	
SierrablenPlus®															
SierrablenPlus	5	5,0				J½	K	L	L½	M½	N	N½			
Sportsmaster®															
Sportsmaster CRF	4	5,2				L	M	M½	N½	O					
Sierraform® GT															
Sierraform GT	7	3,8			H½	I	I½	J							
Greenmaster® Pro-Lite															
Greenmaster Pro-Lite	6	4,0				H½	I	I½							
Fairwaymaster®															
Fairwaymaster Mini	5	5,0				J½	K	L	L½	M½	N	N½			
Step™ Hi-Mag															
Step Hi-Mag	7	4,3	G½	H	I										

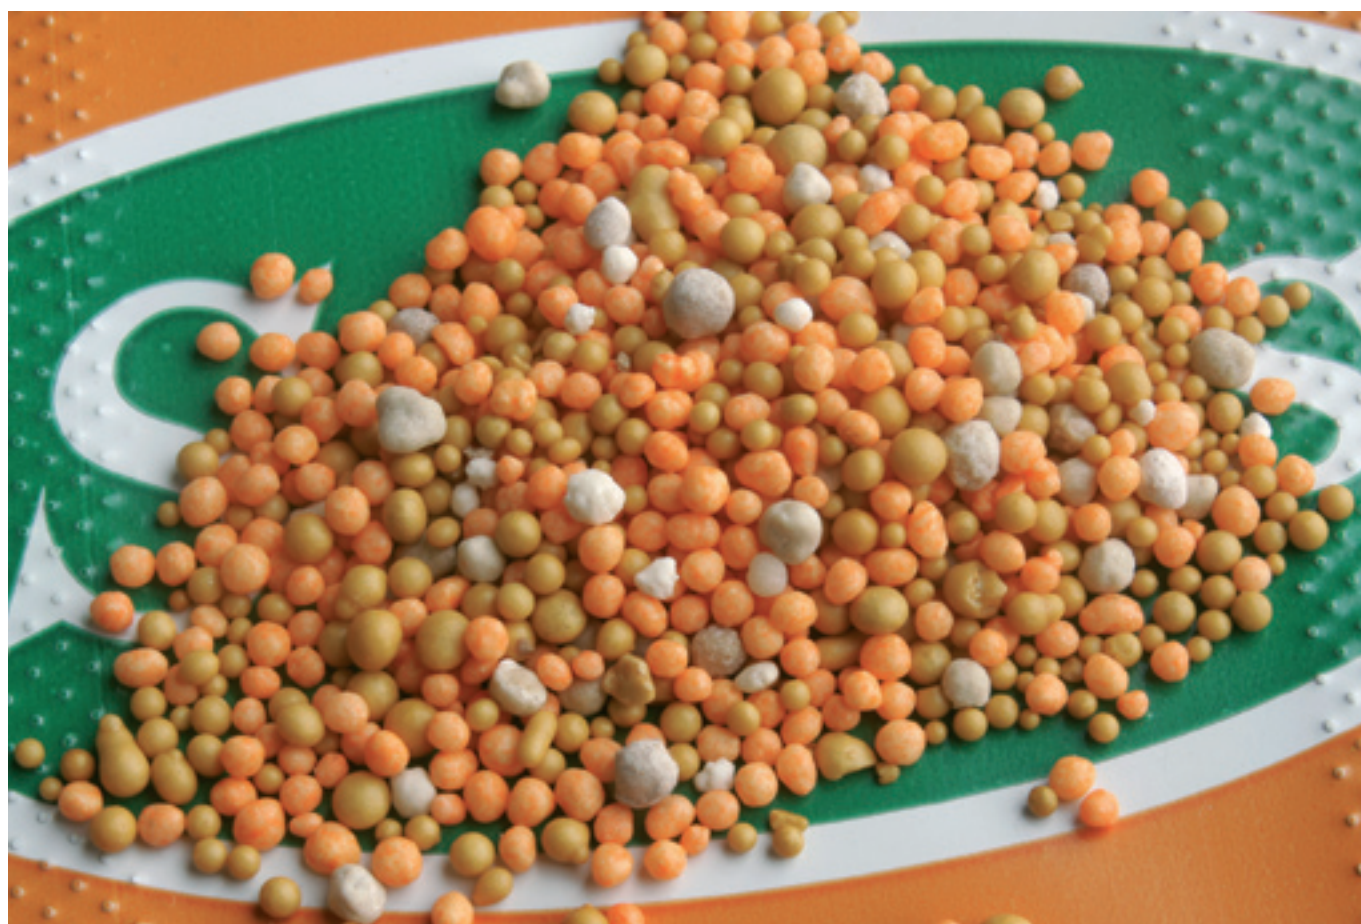

Scotts rotary spreaders: AccuPro 2000 / SR 2000
Settings for single pass application at full rate

Product name	Cone setting	Effective width (m)	Spreader setting at full label rates amount of product (g/m ²) applied after one run:												
			5	10	15	20	25	30	35	40	45	50	55	60	
Sierrablen®															
Sierrablen	4	5,4			N	O½	Q	R½	T½	V	X	Q (x2)	R (x2)	R½ (x2)	
SierrablenPlus®															
SierrablenPlus	5	5,0			L	M½	N½	P	Q	R	S½				
Sportsmaster®															
Sportsmaster CRF	4	5,2		L	M½	O	P	Q½	S	T½					
Sierraform® GT															
Sierraform GT	7	3,8		I	J	K	L	M	M½						
Greenmaster® Pro-Lite															
Greenmaster Pro-Lite	6	4,0			I	J	K	K½	L½						
Fairwaymaster®															
Fairwaymaster Mini	5	5,0			L	M½	N½	P	Q	R	S½				
Step™ Hi-Mag															
Step Hi-Mag	7	4,3	H	I½	K½										

Scotts drop spreader: SS-2
Settings for single pass application at full rate

Product name	Effective width (m)	Spreader setting at full label rates amount of product (g/m ²) applied after one run:												
		5	10	15	20	25	30	35	40	45	50	55	60	
Sierraform® GT														
Sierraform GT	0,91	3,25	3,75	4,25	4,75	5,25	5,75	6,25	6,50	6,75				
Greenmaster® Pro-Lite														
Greenmaster Pro-Lite	0,91	3,75	4,00	4,50	5,00	5,25	5,50	6,00	6,25	6,50				

Coated products aren't suitable for drop spreaders.

Recommended spreader settings are given for a walking speed of approximately 5 km/hour. Given spreader settings are recommendations only. Exact rates, using the settings given in this table, can not be guaranteed, as rates are dependent on the spreader itself and the accuracy of the person operating it.

